



3 Half Height Device Bay,
Single Power Supply, Ultra-Low Profile 2-U Rackmount Enclosure

With Support for:

- SCSI Narrow/Ultra-Wide Single Ended/Ultra-Wide Differential
- SCSI Ultra II LVD
- SCSI Ultra III LVD
- Fibre
- Network Attached Storage

*HIGH CAPACITY &
ULTRA LOW PROFILE*



- Mounts up to Three 5.25 Inch Half-Height Devices (3.5 Inch Drives) With Support for Hard Drives, CD Drives, Optical Disks, DAT and Tape Drives
- Available in Narrow and Ultra Wide SCSI as well as Low Voltage Differential (LVD)
- Fits Standard 19-inch RETMA Rackmounts
- Drive Security Provided by Individual Keylocked Drive Trays
- Quality All-Metal Construction and Agency Approved Components Ensure Compliance with UL, CSA, TUV and FCC Standards
- Flexibility in Configuration Options Include Choice of Drive Trays, a Variety of Cables and Connectors, and Custom Painting to Match any Product, System or Facility Decor
- Easy Access Design Allows for Quick and Easy Replacement of all Internal and External Components
- Ultra Low Profile Design Maximizes Rack Space
- RJ45 Ethernet Connector Available
- Rackmount Slide Kit & Desktop Conversion Kits Optional





ELECTRICAL

AC Input Power

Voltage	115/230 VAC ± 15% (Auto Switching)
Frequency	47 to 63Hz
Protection	5A/250V Fuse

DC Output Power

Continuous	200W
+5VDC	20A
+12VDC	8A

ENVIRONMENTAL

Temperature

Operating	0 to 50° C
Storage	-25 to 85° C

Humidity

0 to 95%
Non-Condensing

Altitude

Operating	0 to 10,000 Feet
Storage	0 to 30,000 Feet

PHYSICAL

Installation

Rackmount, Table Top

Dimensions

19in. w x 15in. d x3.5in. h

Weight

35lbs Unpopulated

CONFIGURATION

Trays

Supports up Three 5.25in. Half-Heigh Devices

Power Supplies

One 200W Power Supply

RAID Controllers

Supports 5.25in. Half-Height Form Factor

CONNECTOR LOCATIONS

Standard

Four SCSI II/III

COOLING

Two 12VDC, 27CFM Fans Provide Front to Rear Cooling

ACCESS

Peripherals

Keylock Protected Quick-Disconnect Trays,
Hot-Swappable

Cabling

Through Easy to Remove Top Cover


ACTIVITY INDICATORS

Drives


Amber LED on Front of Each Drive Tray

ADDITIONAL OPTIONS

- OEM Logo Silkscreening
- Rackmount Slide Kit
- Tabletop Conversion Kit
- RJ45 Connector
- Telco DC -48V Power Supply

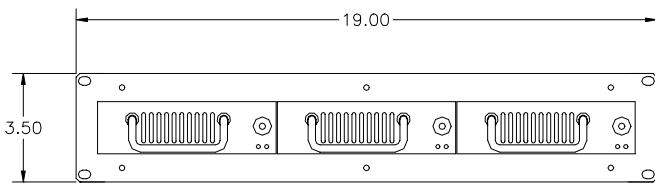

Drive Tray Locations
FRONT VIEW



REAR VIEW

